



boomerang
tracker

BT

3G GPS *Live*
'ISO' Security-Tracker



BT- The Self-powered 'ISO' GPS Security-Tracker

- Track your assets Globally*
- Get Alerts on your Smartphone
- Fully self-powered
- Instant 'zero-tool' installation
- Minimise losses
- Reduce Insurance risk
- Keep clients updated

BT is a rugged, self-powered GPS security tracker for tracking and protecting assets globally. View the live location of your assets and receive notifications immediately if your goods are tampered with or other exceptional conditions occur. BT provides real-time alerts and updates about your valuable assets. Other features include:

- Easy Install (no wiring needed)
- Impact Sensor
- Geo Fencing function
- Small size so hidden easily

Small in size, the BT is also ideal for tracking vehicles, boats, motorcycles, plant and farm machinery. Designed for rapid, 'zero-tool' deployment, the BT boasts long battery life and is rechargeable.

Updates & reports are provided via native Smartphone & Tablet Apps, and via PC.

*BT '3G' requires cellular coverage. Oceanic positions require BT-1 which adds Satellite Communications.

Please contact us for more info:


Boomerang Tracker

308 Harbour Point Business Park,
Little Island,
Cork,
Ireland.

E: info@boomerangtracker.com

W: www.boomerangtracker.com

Tel: [+353 \(0\) 21 500 3999](tel:+353(0)215003999)

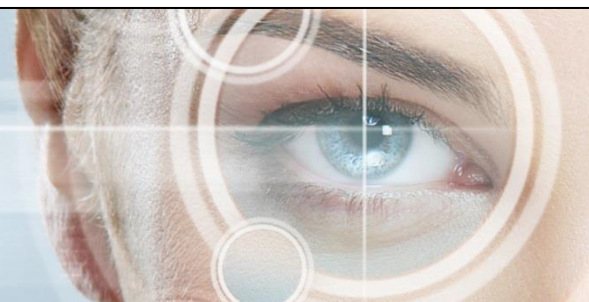



Supply	Voltage	3.7V
Temperature	Operational Storage	-20°C to +60°C -40°C to +85°C
Operating Humidity		Up to 90%
Measurement & Weight		194.6 x 108.6 x 40.5mm (7.75 x 4.2 x 1.65 inch) & 323g (11.4oz)
Cellular Communication	GSM/GPRS - default Optional Modems Antenna type Data channels Protocol	Quad Band (850, 900, 1800, 1900) UMTS/HSPA+, CDMA/1xRTT/EV-DO, LTE Built-in (concealed) SMS & TCP/IP Propriety – encrypted
Location	Type Time to First Fix (TTFF) Positioning Accuracy Antenna type	GPS, GLONASS (optional) 2 sec (hot start) 10m CEP (50%) Velocity: 0.2m/s (50%) Built in (concealed)
CPU Capacity	Static RAM Nonvolatile memory Flash Memory	128 Kb 34 Kb 2048 Kb
Sensors Temperature	Range Accuracy	-45°C to +125°C ± 0.2°C
Relative Humidity	Range Accuracy	0% to 100% ± 1.8 %
Accelerometer	Scale Accuracy	± 8g ± 2.5%
Light	Resolution Sensitivity	0.025 LUX 0 - 104,448 LUX (Sunlight)
Inputs	Push-button Door Switch	1 1
Battery Pack	Type Capacity	Li-Ion 5200 mAh
Power Consumption	Sleep/Idle GPS only GPRS only GPS and GPRS	0.05mAh 75 mAh 100mAh 165 mAh
Access Port	TYPE	TTL

Please contact us for more info:

Boomerang Tracker
308 Harbour Point Business Park,
Little Island,
Cork,
Ireland.

E: info@boomerangtracker.com

W: www.boomerangtracker.com

Tel: [+353 \(0\) 21 500 3999](tel:+353(0)215003999)

